

File No.	689	SHEET	1/1

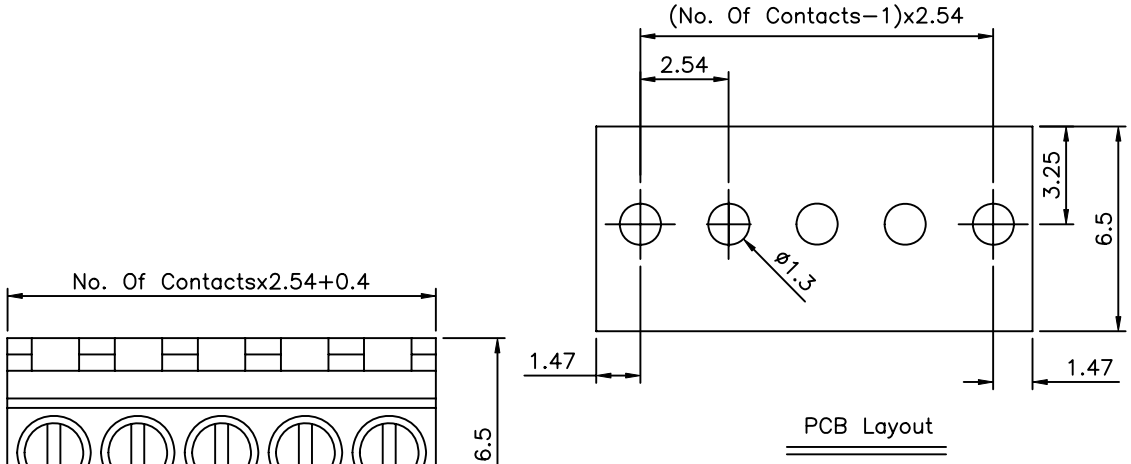

SPECIFICATION

Voltage Rating:150V AC
Current Rating:6 Amps/Way Max.
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms/1000V
Operation Temperature:−33°C To +105°C
Withstanding Voltage:1000V AC(1Minute)
Test Time=60Sec./1PCS
Wire Range:18~30AWG
Torque:1.0kgf.cm/M1.6
Soldering Reliability:
Test Temperature=250°C±10°C
5 Seconds Max.
Contact:Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Solder Pin:Copper Alloy,Tin Plated
Insulator:Polyamide(Glass Filled)
UL94V−0,Green
RoHS Compliant

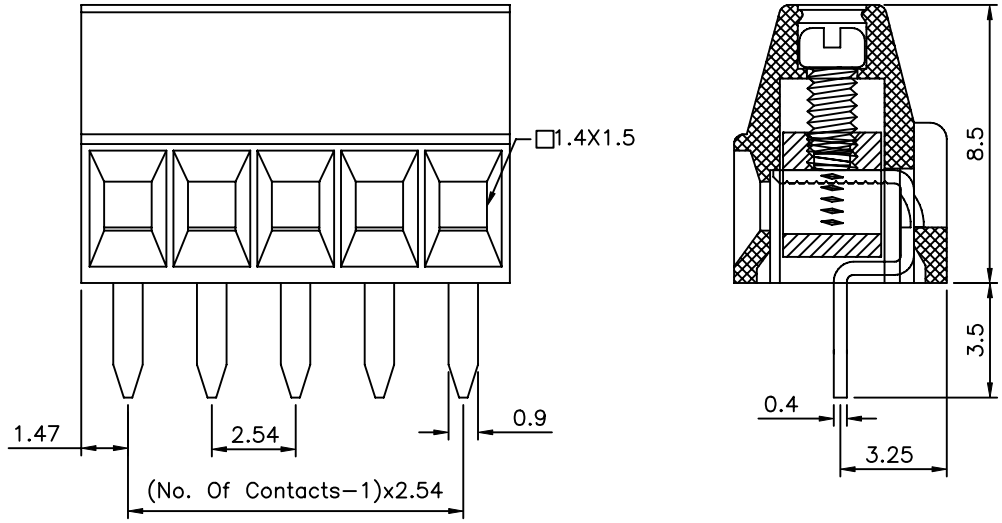

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
20086	MEI	X. ±0.50
	CHECKED BY HZF	.X ±0.30
	DRAWING BY XYH	.XX ±0.20
		ANG. ±1°
SCALE NONE	REV. A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	07/26/2009